



CP1R*-W

ROLLER OPERATED FAST/SLOW SPEED SELECTION VALVE


SERIES 21

THREADED PORTS

p max 70 bar

Q max 40 l/min.

OPERATING PRINCIPLE

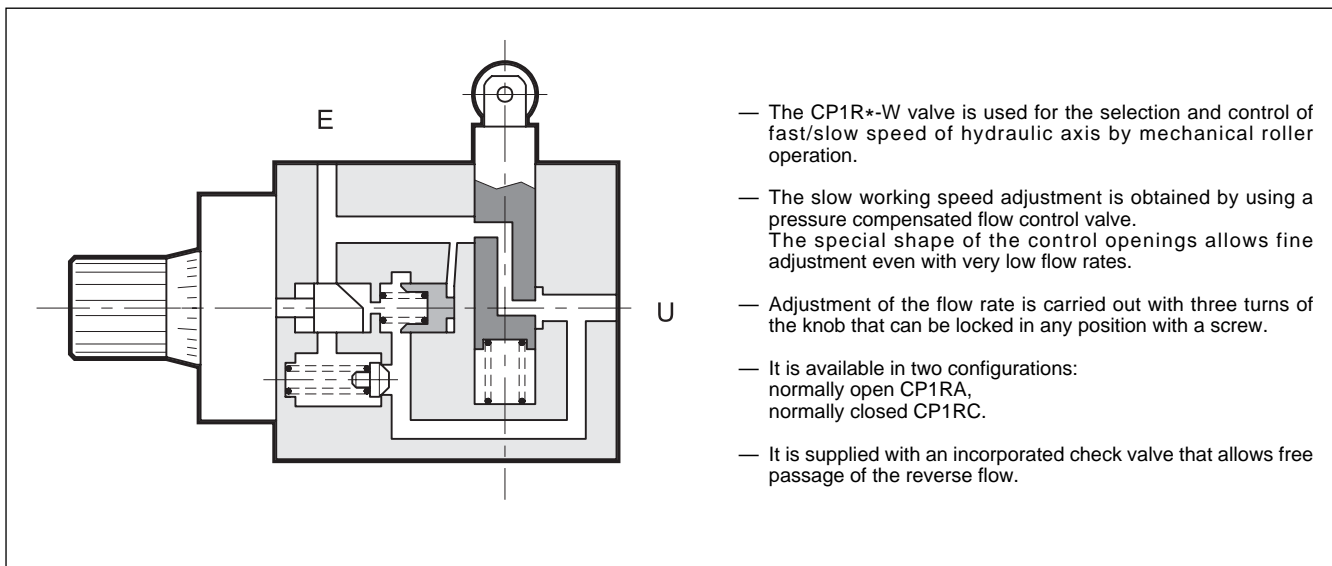

CONFIGURATIONS (see Hydraulic symbols table)

- CP1RA-W: normally open - fast movement with roller in rest position and controlled slow movement with roller in operation.
- CP1RC-W: normally closed - controlled slow movement with roller in rest position and fast movement with roller in operation.

PERFORMANCE RATINGS (obtained with mineral oil with viscosity of 36 cSt at 50°C)

Maximum operating pressure	bar	70
Fast movement maximum flow rate	l/min	40
Controlled slow movement flow rate	max. l/min min. l/min	4 - 10 - 16 0,1
Roller working movement	mm	6
Roller operation force	N	300
Ambient temperature range	°C	-20 ÷ +50
Fluid temperature range	°C	-20 ÷ +80
Fluid viscosity range	cSt	10 ÷ 400
Recommended viscosity	cSt	25
Degree of fluid contamination	According to NAS 1638 class 10	
Mass	kg	3,2

HYDRAULIC SYMBOLS

