



DIPLOMATIC
HYDRAULICS

82 210/100 ED



RPCED1-*-T3


THREE-WAY DIRECT OPERATED FLOW CONTROL VALVE WITH ELECTRIC PROPORTIONAL CONTROL SERIES 51

SUBPLATE MOUNTING CETOP 03


p max **250** bar

Q max (see specification table)

MOUNTING INTERFACE

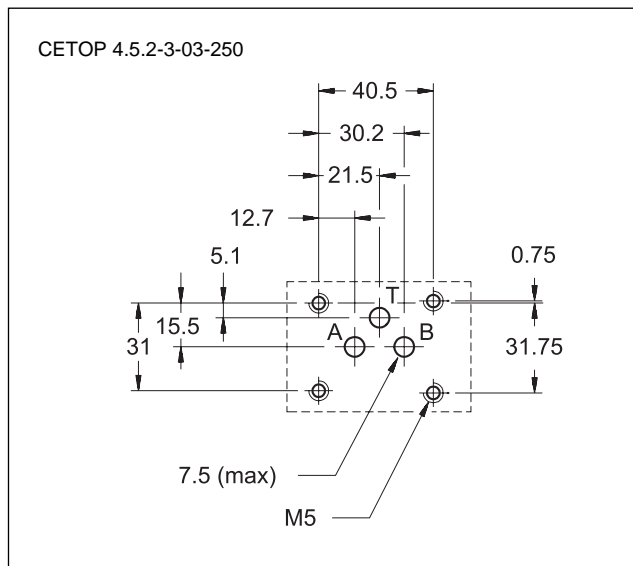

OPERATING PRINCIPLE

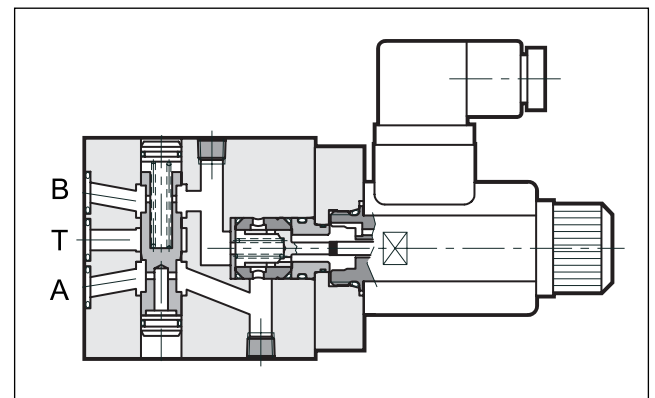

- RPCED1-*-T3 is a three-way flow control valve, pressure and temperature compensated with electric proportional control and mounting interface in compliance with CETOP standards.
- This valve controls the flow to the circuit, by dumping the exceeding oil flow to the tank.
- Flow rate can be modulated continuously in proportion to the current supplied to the solenoid.


SPECIFICATIONS

(obtained with mineral oil with viscosity of 36 cSt at 50°C and in conjunction with the control unit UEIK-11)

Maximum working pressure	bar	250
Minimum Δp across A and B ports	bar	8
Maximum controlled flow	l/min	1,5 - 4 - 8 - 16 - 25
Minimum controlled flow (for 1 and 4 l/min. reg.)	l/min	0,025
Step response	see par. 7	
Hysteresis	% di Q max	< 6%
Repeatability	% di Q max	< $\pm 2,5\%$
Electrical features	see par. 6	
Ambient temperature range	°C	-10 ÷ +50
Fluid temperature range	°C	-20 ÷ +70
Fluid viscosity range	cSt	13 ÷ 380
Recommended viscosity	cSt	25
Fluid contamination degree	according to NAS 1638 class 7 class 6 (for flows < 0,5 l/min)	
Mass	kg	1,5

- The valve can be controlled directly by a current control supply unit or by means of the relative electronic control units to exploit valve performance to the full (see par. 10).
- It is available in five flow rate control ranges up to 25 l/min.

HYDRAULIC SYMBOLS

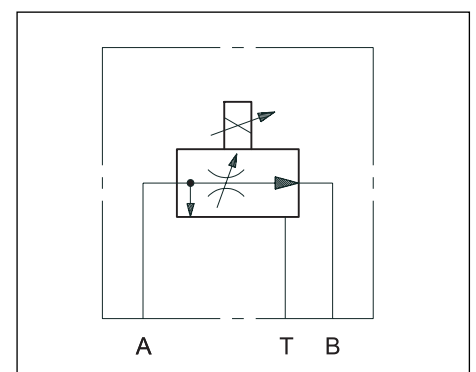




RPCED1-*-T3


SERIES 51

1 - IDENTIFICATION CODE

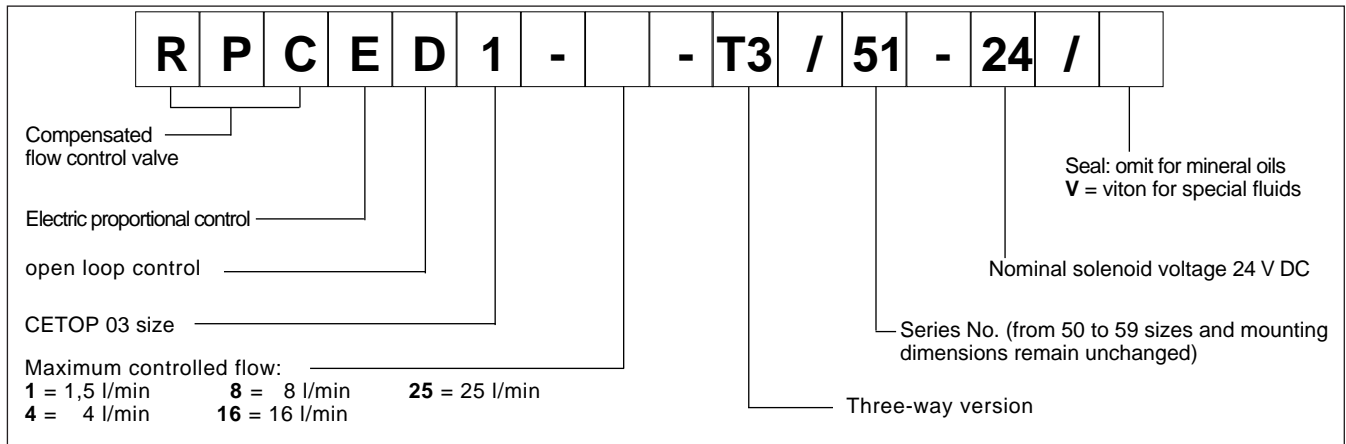


2 - CHARACTERISTIC CURVES (measured with viscosity of 36 cSt at 50°C)

FLOW CONTROL $Q=f(I)$

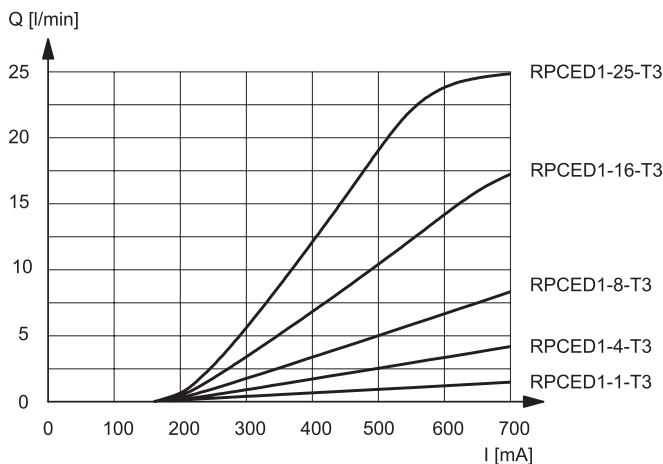

Typical curves for flow rate A → B according to the current supplied to the solenoid for controlled flow rate of: 1-4-8-16-25 l/min.

PRESSURE DROP $\Delta p=f(Q)$

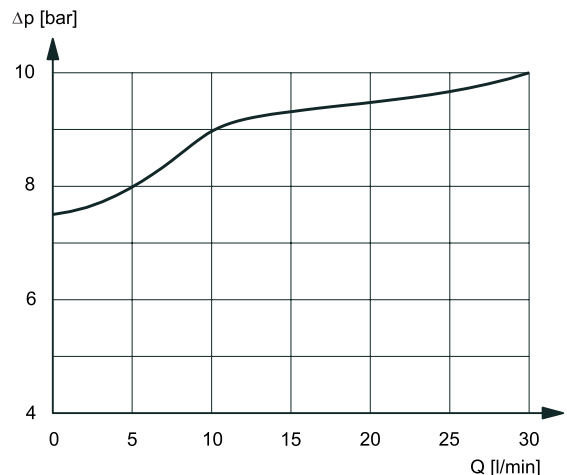

Pressure drop with flow A → T through the compensator.

3 - PRESSURE COMPENSATION

The valves are equipped with two restrictors. The first is an opening which can be adjusted by the proportional solenoid; the second, controlled by the pressure upstream and downstream of the first restrictor ensures constant pressure drop across the adjustable restrictor. In these conditions, the set flow rate value is maintained constant within a tolerance limit of $\pm 2\%$ of the set flow rate for maximum pressure variation between the valve inlet and outlet chambers.

4 - THERMAL COMPENSATION

Thermal compensation of the valve is obtained by adopting the principle of restricted fluid passage, so that the fluid is not influenced significantly by variations in oil viscosity.

For controlled flow rates of lower than 0.5 l/min and with a temperature change of 30°C, flow rate varies by approx. 13% of the set value.

For higher flow rates and with the same temperature change the flow rate variation is <4% of the set flow rate.

5 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HLP type, according to ISO 6743/3.

For fluids HFD-R type (phosphate esters) use FPM seals (code V). For the use of other fluid types as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 70°C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.



6 - ELECTRICAL CHARACTERISTICS

6.1 - Proportional solenoid

The proportional solenoid comprises two parts: tube and coil.

The tube, screwed to the valve body, contains the armature which is designed to maintain friction to a minimum thereby reducing hysteresis.

The coil is mounted on the tube secured by means of a lock nut and can be rotated through 360° depending on installation clearances.

NOMINAL VOLTAGE	VCC	20
RESISTANCE (at 20°C)	Ω	18,5
CURRENT	nominal maximum	A 0,7 0,82
DUTY CYCLE	100%	
ELECTROMAGNETIC COMPATIBILITY (EMC)	in compliance with 89/336 EEC	
- EMISSIONS	EN 50081-1	
- IMMUNITY	EN 50082-2	
PROTECTION TO ATMOSPHERIC AGENTS (according to IEC 144 standards)	IP 65	

7 - STEP RESPONSE (measured with mineral oil with viscosity of 36 cSt at 50°C in conjunction with UEIK-11 electronic control unit)

Step response is the time taken for the valve to reach 90% of the set pressure value following a step change of reference signal. The table illustrates typical response times with valve flow rate of 16 l/min and with input pressure of 100 bar.


REFERENCE SIGNAL STEP	0→100%	100%→0	25→75%	75→25%
Step response [ms]				
RPCED1-*-T3	60	80	50	70

8 - INSTALLATION

RPCED1-*-T3 valves can be installed in any position without impairing correct operation.

Ensure that there is no air in the hydraulic circuit.

Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed fluid can easily leak between the valve and support surface.

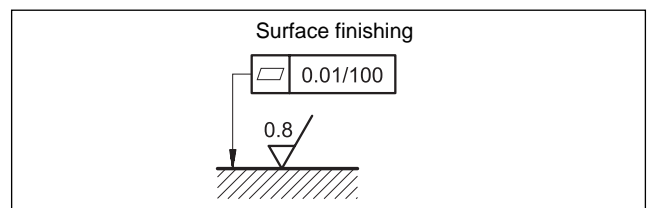




RPCED1-*-T3

SERIES 51

9 - OVERALL AND MOUNTING DIMENSIONS

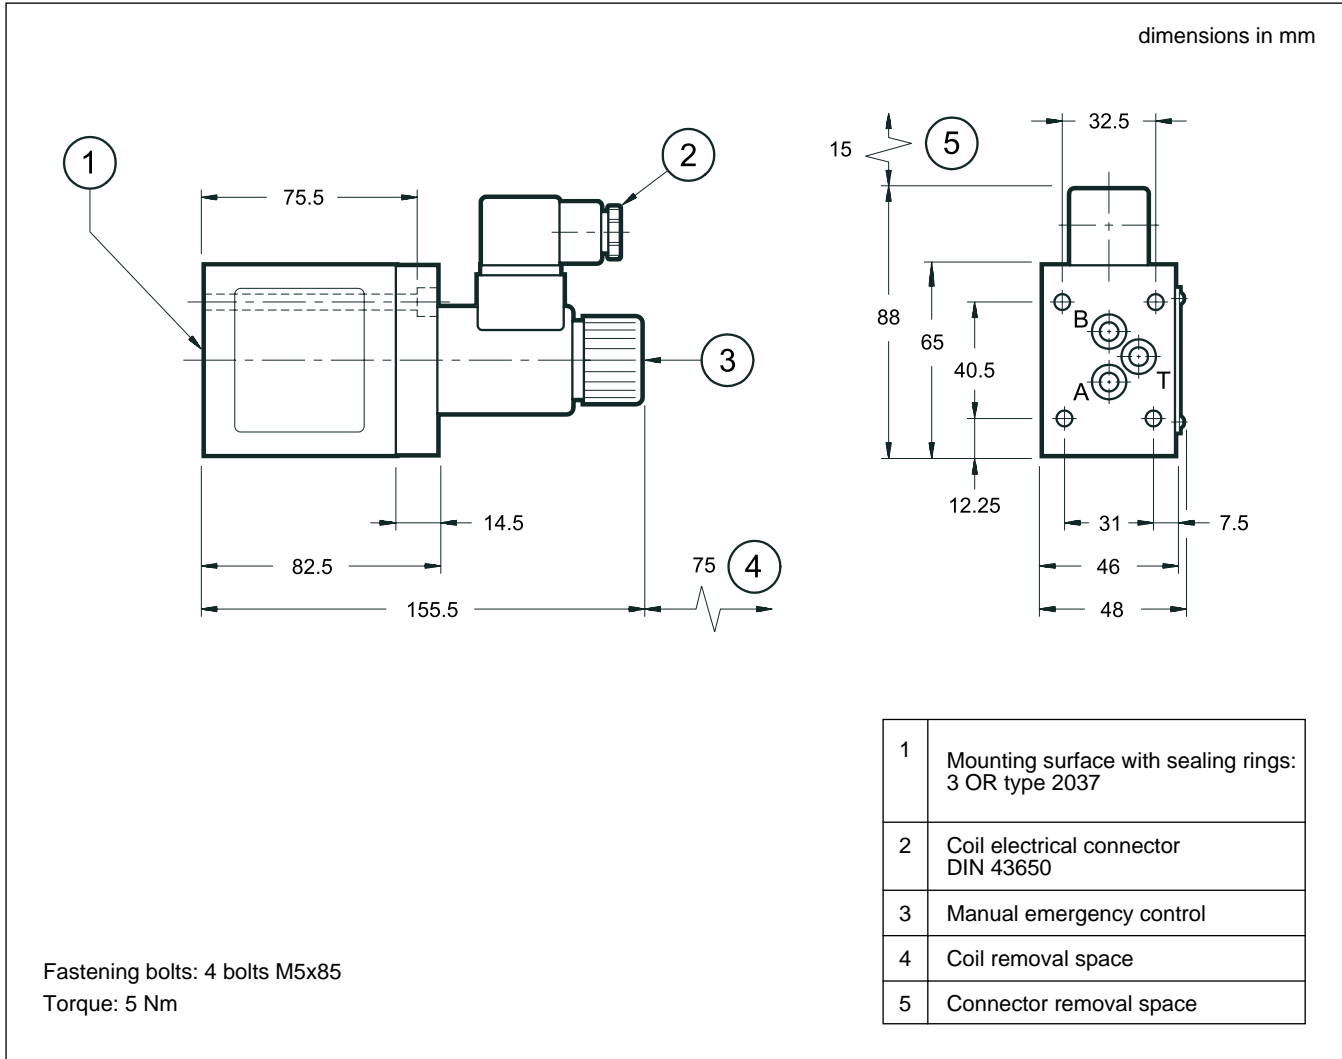

10 - ELECTRONIC CONTROL UNITS

EPC-110	plug version	(see cat. 89 110)
EPA-M110	rail mounting	DIN EN 50022 (see cat. 89 220)
UEIK-11	Eurocard format	(see cat. 89 300)

11 - SUBPLATES (see catalogue 51 000)

Type	PMMD-AI3G rear ports with user P plugged
Type	PMMD-AL3G side ports with user P plugged
Port threading	3/8" BSP

 DIPLOMATIC HYDRAULICS	DIPLOMATIC OLEODINAMICA SpA 20025 LEGNANO (MI) - P.le Bozzi, 1 / Via Edison Tel. 0331/472111-472236 - Fax 0331/548328
--------------------------------------	--