



**DIPLOMATIC
HYDRAULICS**

92 100/105 ED

PTH

PRESSURE TRANSDUCER

SERIES 20



p max 40 - 100 - 250 - 400 bar

DESCRIPTION

This series of pressure transducers has been designed in order to be used for the main industrial applications and on moving machines.

The main feature of this transducer is to ensure its functioning also in bad working conditions, especially for what concerns the fluid temperature range which can go from a minimum of - 40 °C up to a maximum of + 120 °C

The functioning of this transducer is based on the strain-gauge principle, which is powered by an electric circuit developed according to the SMT technology which ensures a high reliability and maximum resistance to vibrations and mechanical stress.

Every component which is in contact with the fluid is made of stainless steel and the transducer is completely fluidproof.

The protection class of the electrical connection is IP65 for the version with DIN connector, while the version with the M12 connector has a protection class IP67.


They are available with current output signal 4 ÷ 20 mA or with voltage output signal 0 ÷ 10 V and they have the reverse polarity protection.

These transducers are available in 4 different pressure ranges, from 40 to 400 bar.

TECHNICAL CHARACTERISTICS (see parag. 3)

Nominal pressure P _N	bar	40 - 100 - 250 - 400	
High dynamic pressure	% P _N	75	
Maximum pressure	% P _N	200	
Class of precision	% P _N	0,5	
Output signal	voltage	V	0 ÷ 10
	current	mA	4 ÷ 20
Working temperature range	°C	-40 / +120	

HYDRAULIC SYMBOLS

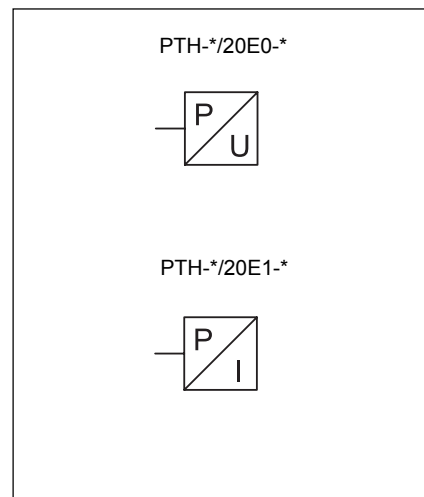



1 - IDENTIFICATION CODE

P	T	H	-	/	20	E	-	
---	---	---	---	---	----	---	---	--

Pressure transducer

High dynamic performance

Nominal pressure
040 = 40 bar **250** = 250 bar
100 = 100 bar **400** = 400 bar
 (other pressure values are available upon request)

Series no.: (the overall and mounting dimensions remain unchanged from 20 to 29))

Electrical connection
K10 = Reduced electrical connector DIN 43650
(standard)
K12 = electrical connector M12 (on request)

Output signal
0 = 0 ÷ 10 V
1 = 4 ÷ 20 mA **(standard)**
 (Other types of output signal are available on request)

Integrated electronics with analogic output

NOTE: the standard hydraulic connection is with threaded port of G 1/4 DIN 3852 and integrated seal.
 Other types of connection are available upon request.

2 - OVERALL AND MOUNTING DIMENSIONS

PTH-*/20E*-K10

dimensions in mm

1	Integrated plain seal in viton
2	Hexagonal: spanner 27 Tightening torque 25 Nm max
3	Reduced electrical connector DIN 43650 delivered with the transducer

PTH-*/20E*-K12

1	Integrated plain seal in viton
2	Hexagonal: spanner 27 Tightening torque 25 Nm max
3	Connector M12x1 not included in the supply



3 - TECHNICAL CHARACTERISTICS

Nominal pressure P_N	bar	40	100	250	400
Maximum pressure	$\times P_N$	$\times 2$	$\times 2$	$\times 2$	$\times 2$
Cracking pressure	$\times P_N$	$\times 6$	$\times 5$	$\times 4$	$\times 3,5$

Output signal		E0	E1
		$0 \div 10$ V	$4 \div 20$ mA
Max current consumption	mA	≤ 12	23
Supply voltage	DC V	$12 \div 30$	$10 \div 28$
Load resistance	K Ω	2,5	see parag. 4.2
Response time	ms	< 1	
Class of precision	% P_N	0,5	
Hysteresis	% P_N	$\pm 0,2$	
Repeatability	% P_N	$\pm 0,05$	
Linearity	% P_N	$\pm 0,2$	
Stability after 1 million cycles	% P_N	$\pm 0,1$	
Working temperature range	$^{\circ}\text{C}$	$- 40 / + 120$	
Thermal drift from 0 to $+ 100$ $^{\circ}\text{C}$	% P_N	± 1	

Electromagnetic compatibility (EMC)	Emission 61000-6-3	Immunity 61000-6-2
Vibration resistance	> 20 G	
Pressure connection	G 1/4" with integrated seal	
Electrical connection	3 poles + earth DIN 43650 reduced connector for K10 connection	
	M12x1 4 pin straight connector for K12 connection (upon request)	
Protection class (EN 60529)	IP 65 for K10 connection	IP 67 for K12 connection
Ambient temperature range	$- 20 / + 80$ for K10 connection	$- 25 / + 85$ for K12 connection
Body material	AISI 304	
Mass	0,1 Kg	

4 - TRANSDUCER VOLTAGE

4.1 - PTH-*/20E0-*


These transducers have been equipped with voltage stabilizer which supplies the electric circuit with constant voltage, independently from power supply voltage.

We recommend a stabilized power supply voltage of 24 Vcc.

4.2 - PTH-*/20E1-*

We report the functioning diagramm of the transducer.

The VTA area represents the functioning zone of the fransducer related to the chosen load resistance R_L . We recommend a power supply voltage of 24 Vcc and a load resistance of 700 Ohm.

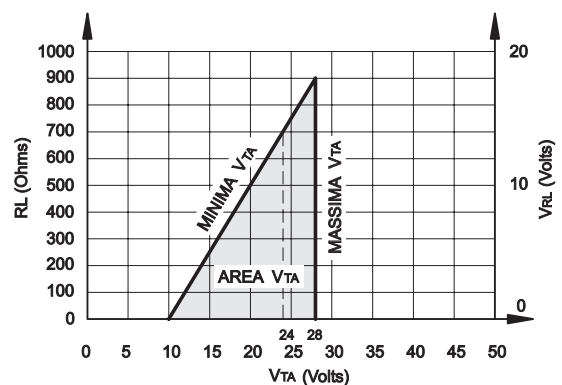

N.B. Outside the VTA area the correct functioning of the transducer is not assured.



5 - WIRING DIAGRAMS

PTH-*/20E0-K10

1 = output 0 ÷ 10 V
2 = 0 V
3 = 12 ÷ 30 Vcc
4 (indicated on the connector by the symbol \oplus) = GND

PTH-*/20E1-K10


1 = output 4 ÷ 20 mA
2 = 10 ÷ 28 Vcc
3 = not connected
4 (indicated on the connector by the symbol \oplus) = GND

PTH-*/20E0-K12

1 = not connected
2 = 10 ÷ 30 Vcc
3 = 0 V
4 = output 0 ÷ 10 V
5 = GND

PTH-*/20E1-K12

1 = output 4 ÷ 20 mA
2 = not connected
3 = not connected
4 = 10 ÷ 28 Vcc
5 = GND



DIPLOMATIC OLEODINAMICA SpA
20025 LEGNANO (MI) - P.le Bozzi, 1 / Via Edison
Tel. 0331/472111 - Fax 0331/548328